

VENTOSAS
VACUUM CUPS

COPA
CONCAVE

VC




CARACTERÍSTICAS • CHARACTERISTICS

Ø reposo / Ø trabajo	Ø unloaded / Ø loaded	[mm]
Mín. radio de curvatura	Minimum curve radius	[mm]
Carrera máxima	Maximum stroke	[mm]
Volumen	Volume	[cm³]
Peso	Weight	[g]
Fuerza a -0,4 bar	Force at -0,4 bar	[Kgf]
Fuerza a -0,6 bar	Force at -0,6 bar	[Kgf]
Fuerza a -0,8 bar	Force at -0,8 bar	[Kgf]
Fuerza a -0,9 bar	Force at -0,9 bar	[Kgf]


CÓMO PEDIR • HOW TO ORDER

	Ventosa de silicona 40 shores sin racor Vacuum cup silicone 40 shores without fitting
	Ventosa de silicona sin racor Vacuum cup silicone without fitting
	Racor de montaje estándar Standard fitting part

Ø 15

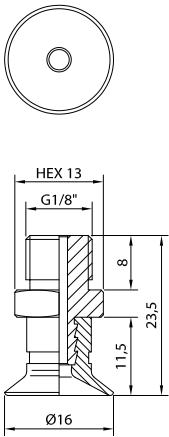

Ø 18

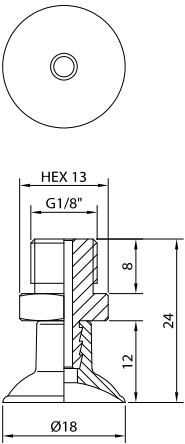

ADECUADAS PARA
SUITABLE FOR

Uso general
General use

Superficies planas
Flat surfaces

Superficies ligeramente curvadas
Slightly curved surfaces

VENTAJAS
ADVANTAGES

Amplio rango de diámetros
Wide range of diameters

Polivalencia
Versatility